



TELECOM

Making your Mobile Net "Work" Better

HEADQUARTERS

OFFICE: 15<sup>th</sup> floor, Rongchao Mansion, Longcheng Street, Longgang, Shenzhen, China

Tel: +86 755 8482 7256

E-mail: sales@ztelecom.com

Web: www.ibscomponents.com  
www.ztelecom.com


XXXXXPoI Panel 698-960/1710-2690/1710-2690/1710-2690/1710-2690 65°/65°/65°/65°/65° 11/11/11/11/11dB

Electrical Specifications

Item No.	ZD698-2690XXXXX11i11i11i11i65B						
Frequency Range	MHz	698-806	806-870	870-960	1710-1880	1880-2170	2170-2690
Gain	dBi	10.5	11.5	12	11	11.5	12.5
Polarization		1 x±45			4 x±45		
Beam width	Horizontal	68±10			65±10		
	Vertical	30			33		
Front-To-Back Ratio (-180±30)	dB	> 20			> 25		
VSWR		≤1.5:1			≤1.5:1		
Isolation	dB	> 26			> 26		
PIM, 3rd Order, 2 x 43 dBm,	dBc						-150
Maximum Power	W						250
Impedance	Ω						50

Mechanical Specifications

Dimensions, HxWxD	mm	990x328x148					
Weight, without Mounting Kit	kg	10.5					
Radome Material and Color		Fiberglass, gray					
Connector Type and Location		10 x 7-16 DIN Female, Bottom					
Mounting hardware	mm	Φ45~Φ95					
Operational Wind Speed	km/h	200					
Operational Temperature	oC	-40 to +60					
Operational Humidity	%	< 95					

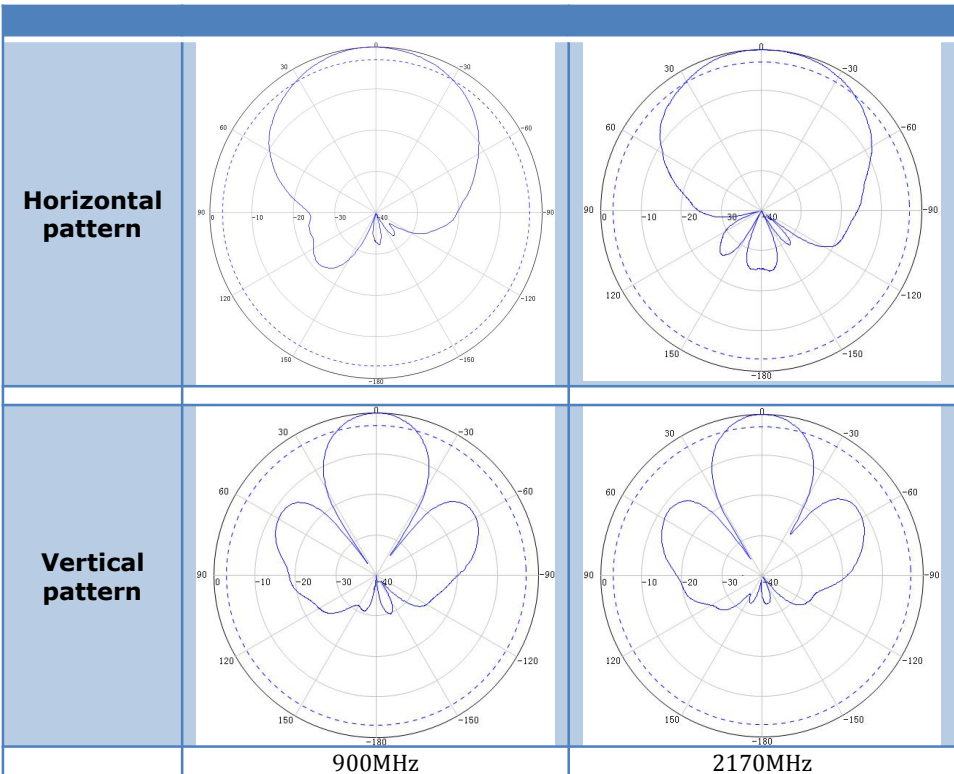

698-960 (-45°)	1710-2690 (-45°)	1710-2690 (-45°)	1710-2690 (-45°)	1710-2690 (-45°)	698-960 (+45°)	1710-2690 (+45°)	1710-2690 (+45°)	1710-2690 (+45°)	1710-2690 (+45°)
----------------	------------------	------------------	------------------	------------------	----------------	------------------	------------------	------------------	------------------



HK OFFICE :  
Flat/Rma, 9/f Silvercorp  
International Tower, 707-713 Nathan Road,  
Mongkok, Kowloon, Hongkong

MANUFACTURING RF :  
No. 3, Xinhua Road,  
Shangsha Industrial Park,  
Changan, Dongguan City, China

MANUFACTURING ANTENNA :  
No. 5 Jinxiang Road,  
Zhoubian Industrial Zone,  
Sanshui District, Foshan City, China